


**TABLICA SA KARAKTERISTIČNIM MERAMA
ZA NAPOJNE REZERVOARE TIP ŠNR**

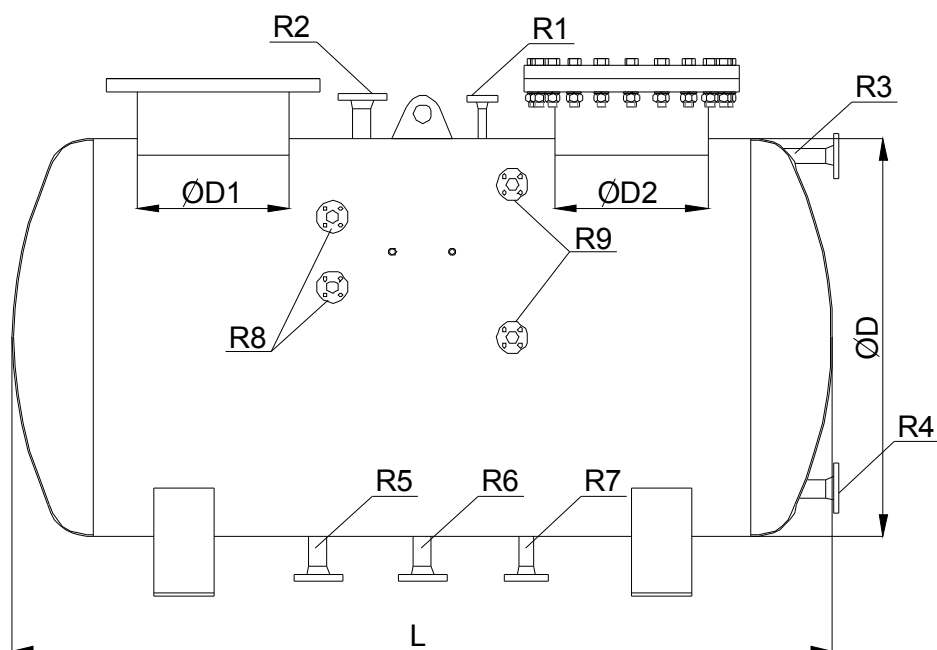


| TIP | V (m ³) | ØD (mm) | L (mm) | PRIKLJUČCI NAPOJNOG REZERVOARA NP16 | | | | | | | | | |
|--------|------------------------|------------|-----------|-------------------------------------|-------|------|------|-------|-------|-------|-------|-------|-------|
| | | | | ØD1 | ØD2 | R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8/R9 |
| ŠNR 1 | 1 | 1000 | 1510 | DN300 | DN500 | DN15 | DN50 | DN40 | DN50 | DN50 | DN50 | DN50 | DN20 |
| ŠNR 2 | 2 | 1000 | 2550 | DN300 | DN500 | DN15 | DN50 | DN40 | DN50 | DN50 | DN50 | DN50 | DN20 |
| ŠNR 3 | 3 | 1250 | 2740 | DN400 | DN500 | DN15 | DN50 | DN40 | DN50 | DN50 | DN50 | DN50 | DN20 |
| ŠNR 4 | 4 | 1250 | 3150 | DN400 | DN500 | DN15 | DN50 | DN40 | DN50 | DN50 | DN50 | DN50 | DN20 |
| ŠNR 5 | 5 | 1600 | 2820 | DN400 | DN500 | DN15 | DN50 | DN50 | DN50 | DN50 | DN50 | DN50 | DN20 |
| ŠNR 6 | 6 | 1600 | 3200 | DN400 | DN500 | DN15 | DN50 | DN50 | DN50 | DN50 | DN50 | DN50 | DN20 |
| ŠNR 7 | 7 | 1600 | 3740 | DN400 | DN500 | DN15 | DN50 | DN50 | DN50 | DN65 | DN65 | DN50 | DN20 |
| ŠNR 8 | 8 | 1600 | 4770 | DN400 | DN500 | DN15 | DN50 | DN50 | DN50 | DN65 | DN65 | DN50 | DN20 |
| ŠNR 10 | 10 | 1600 | 5350 | DN500 | DN500 | DN15 | DN50 | DN80 | DN65 | DN80 | DN80 | DN65 | DN20 |
| ŠNR 13 | 13 | 1600 | 6960 | DN500 | DN500 | DN15 | DN50 | DN80 | DN65 | DN100 | DN100 | DN80 | DN20 |
| ŠNR 16 | 16 | 1600 | 8450 | DN500 | DN500 | DN15 | DN50 | DN80 | DN80 | DN100 | DN100 | DN80 | DN20 |
| ŠNR 20 | 20 | 2000 | 6960 | DN600 | DN600 | DN25 | DN50 | DN100 | DN80 | DN100 | DN100 | DN100 | DN20 |
| ŠNR 25 | 25 | 2000 | 8450 | DN600 | DN600 | DN25 | DN50 | DN100 | DN100 | DN125 | DN125 | DN100 | DN20 |
| ŠNR 30 | 30 | 2000 | 10120 | DN600 | DN600 | DN25 | DN50 | DN125 | DN100 | DN125 | DN125 | DN125 | DN20 |
| ŠNR 40 | 40 | 2500 | 8800 | DN600 | DN600 | DN25 | DN65 | DN125 | DN100 | DN150 | DN150 | DN125 | DN20 |
| ŠNR 50 | 50 | 2500 | 10800 | DN600 | DN600 | DN25 | DN65 | DN125 | DN125 | DN200 | DN200 | DN125 | DN20 |

NAPOMENA:

R1 - Dovod hidrazina
 R2 - Prestrujni vod napojnih pumpi
 R3 - Prelivni vod
 R4 - Dovod pare
 R5 - Odvod vode

R6 - Rezervni vod
 R7 - Priključak pražnjenja
 R8 - Priključak nivostata
 R9 - Priključak vodokaza

**TABLICA SA KARAKTERISTIČNIM MERAMA
ZA DEGAZATORE TIP ŠDG**

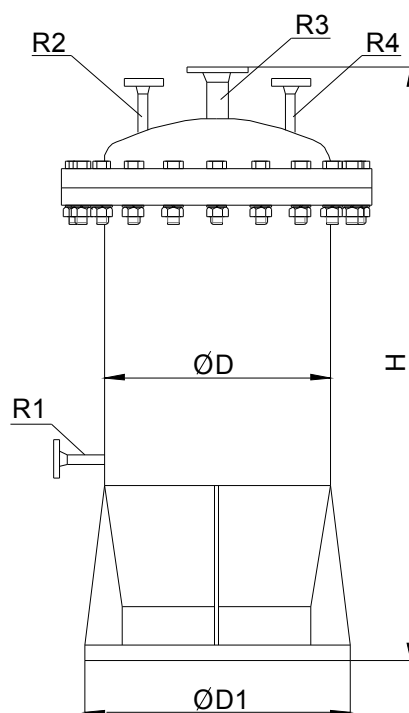

| TIP | V (m ³) | Q (m ³ /h) | ØD (mm) | H (mm) | PRIKLJUČCI DEGAZATORA NP16 | | | | |
|--------|------------------------|--------------------------|------------|-----------|----------------------------|-------|------|-------|------|
| | | | | | ØD1 | R1 | R2 | R3 | R4 |
| ŠDG 1 | 0,27 | 1-3 | 600 | 1650 | DN500 | DN25 | DN25 | DN50 | DN25 |
| ŠDG 2 | 0,36 | 3-5 | 700 | 1700 | DN500 | DN32 | DN25 | DN50 | DN32 |
| ŠDG 3 | 0,54 | 5-7 | 800 | 1800 | DN500 | DN40 | DN25 | DN50 | DN40 |
| ŠDG 4 | 0,72 | 7-9 | 900 | 1880 | DN500 | DN40 | DN32 | DN50 | DN50 |
| ŠDG 5 | 1,1 | 9-15 | 1100 | 1930 | DN500 | DN50 | DN32 | DN50 | DN50 |
| ŠDG 6 | 1,53 | 15-20 | 1200 | 2150 | DN500 | DN50 | DN32 | DN50 | DN65 |
| ŠDG 7 | 2,07 | 20-25 | 1300 | 2410 | DN500 | DN65 | DN50 | DN65 | DN65 |
| ŠDG 8 | 2,52 | 25-30 | 1400 | 2520 | DN600 | DN65 | DN50 | DN65 | DN65 |
| ŠDG 9 | 2,97 | 30-35 | 1500 | 2580 | DN600 | DN100 | DN65 | DN65 | DN80 |
| ŠDG 10 | 3,42 | 35-40 | 1600 | 2750 | DN600 | DN100 | DN65 | DN100 | DN80 |

NAPOMENA:

- R1 - Dovod pare
- R2 - Odvod gasova u atmosferu
- R3 - Dovod omekšane vode
- R4 - Priključak ventila sigurnosti