


**TABLICA SA KARAKTERISTIČNIM MERAMA
ZA KOTLOVE ŠUKOMAX 350-5000kW**

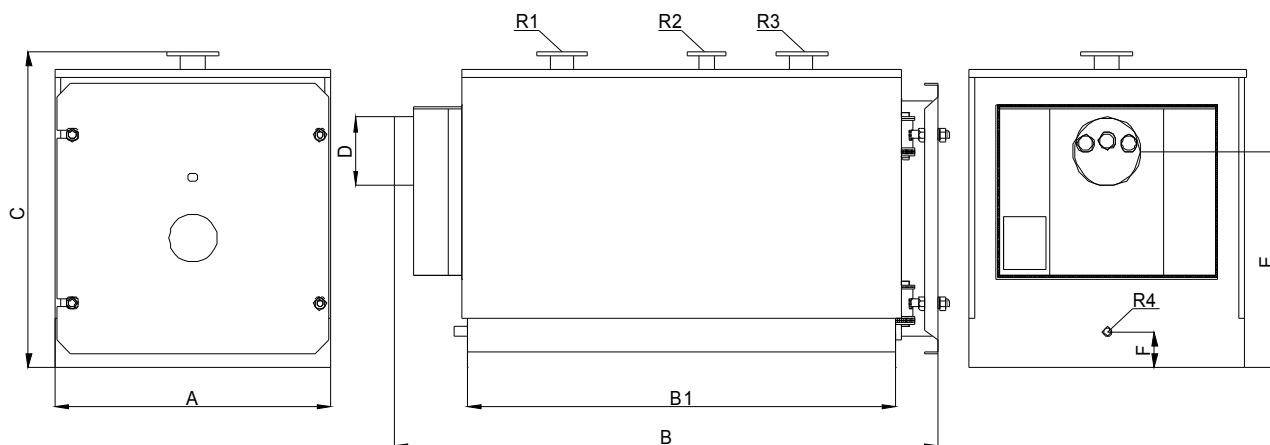

Kotao	Snaga kotla kW	DIMENZIJE PRIKLJUČAKA			DIMENZIJE KOTLA (mm)								Sadržaj vode u kotlu (l)	Otpor ložišta (Pa)	Radni pritisak (bar)	Težina kotla (kg)
		R1/R3	R2	R4	A	B1	B	C	D	E	F					
Šukomax 35	245-350	DN80 NP6	DN50 NP16	3/4"	1030	1580	1960	1170	250	780	130	340	210	3	690	
Šukomax 45	350-465	DN80 NP6	DN50 NP16	3/4"	1050	1645	2035	1210	250	650	150	500	230	3	990	
Šukomax 60	465-580	DN80 NP6	DN50 NP16	3/4"	1060	1780	2190	1270	300	700	150	550	290	3	1135	
Šukomax 70	580-700	DN100 NP6	DN65 NP16	3/4"	1150	1980	2380	1340	350	750	150	640	350	3	1325	
Šukomax 100	700-930	DN100 NP6	DN65 NP16	3/4"	1260	2200	2630	1450	350	830	150	890	400	3	1705	
Šukomax 115	930-1150	DN125 NP6	DN80 NP16	5/4"	1390	2505	2935	1510	400	880	100	1240	420	3	2355	
Šukomax 140	1150-1400	DN125 NP6	DN80 NP16	5/4"	1420	2815	3290	1510	450	1000	100	1430	440	3	2680	
Šukomax 160	1250-1600	DN150 NP6	DN80 NP16	5/4"	1520	2950	3420	1690	550	1150	180	1850	470	3	3705	
Šukomax 200	1800-2300	DN150 NP6	DN80 NP16	5/4"	1750	3790	4590	1840	650	1250	130	2240	480	3	4000	
Šukomax 300	2700-3600	DN200 NP6	DN100 NP16	5/4"	2000	3650	4300	2190	670	1550	180	3890	550	3	6500	
Šukomax 400	3600-4800	DN200 NP6	DN100 NP16	6/4"	2200	3950	4675	2440	670	1650	180	5730	720	3	9500	
Šukomax 500	4500-5500	DN250 NP6	DN125 NP16	6/4"	2585	6270	7030	2830	710	2110	300	9800	930	3	14000	